

HOLDEN

Note: The following procedures should cover most models. Find the closest match to your vehicle. If the procedure does not work, try following the instructions for a different model listed below.

HOLDEN ASTRA AH 2004-2007

1. Ignition OFF.
2. Press and hold down reset button (located between fuel gauge and speedometer) and brake pedal at the same time. After approx 3 sec the service interval appears in the dash.
3. Continue to hold down reset button and brake pedal and turn ignition ON. The dash will flash with "InSP---".
4. Continue to hold down reset and brake pedal until service interval display changes.
5. Continue to hold down reset and brake pedal for approx 10 sec, until the maximum service interval appears.

HOLDEN ASTRA TS 2002-2005

1. Ignition OFF.
2. Press button A (trip reset button).
3. Continue to hold down button A and turn ignition ON. Hold for approx 10 sec. When service is reset "INSP" will disappear from the display.



HOLDEN ASTRA TS 2005

HOLDEN ASTRA 2006 ONWARDS HOLDEN BARINA 2006 ONWARDS

1. Press and hold down trip meter button located in the dash at the same time as pressing down the brake pedal.
2. Continue to hold down button and pedal and turn ignition ON.
3. Continue to hold down button and pedal for approx 5 sec, until "----" appears in the display.
4. Ignition OFF.

HOLDEN BARINA MH 1993 HOLDEN BARINA XC 2001-2005 HOLDEN COMBO XC 2002-2003

1. Ignition OFF.
2. Press and hold button A.
3. Continue to hold down button A and turn ignition ON. The display will flash for 2 sec.
4. Keep pressing button A until "----" appears in the display.
5. Ignition OFF.



HOLDEN BARINA MH 1993

HOLDEN CALAIS VT/VT (II) 1997-2000
HOLDEN CALAIS VX/VX (II) 2000-2002
HOLDEN CAPRICE VS/VS (III) 1997-1999
HOLDEN CAPRICE WH/WH (II) 1999-2003
HOLDEN COMMODORE VT/VT (II) 1997-2000
HOLDEN COMMODORE VX/VX (II) 2000-2002
HOLDEN MONARO V2 2000-2002
HOLDEN STATESMAN WH/WH (II) 1999-2003

1. Ignition OFF.
2. Press and hold both up and down arrow buttons and turn ignition ON.
3. Continue to hold down both buttons for approx. 2 sec.
4. Press "MODE" button once.
5. Press and hold both up and down arrow buttons until a beep is heard.

Note: If the procedure indicated above does not work, turn the ignition off then on for 100 times to reset service interval indicator.



HOLDEN CALAIS VY 2002-2004
HOLDEN COMMODORE VY 2002-2004
HOLDEN COMMODORE VY UTE 2002-2004
HOLDEN COMMODORE VZ 2004-2005

1. Ignition OFF.
2. Press and hold down both up and down trip buttons and turn ignition ON.
3. Continue to hold down buttons for approx 3 sec.
4. Press and hold "SET" button for 3 sec. Reset will be confirmed by a beep. "Service Reset No Items" is displayed.

Note: If the procedure indicated above does not work, turn the ignition off then on for 100 times to reset service interval indicator.



HOLDEN COMMODORE VU UTE 2001-2002

1. Ignition OFF.
2. Press and hold down both up and down trip buttons and turn ignition ON.
3. Continue to hold down buttons for approx 3 sec.
4. Press "MODE" button until the service reminder displays.
5. Hold down both up and down buttons until a beep is heard.



HOLDEN COMMODORE VE 2006 HOLDEN STATESMAN 2004

1. Hold down trip button (A) and turn ignition to ON position.
2. Reset will display on dash (B)
3. Press down on toggle button (C), which will move the service interval to the next service due
4. Ignition OFF

Alternative Procedure:


1. Ignition OFF.
2. Press and hold down the trip button (A) and turn ignition ON. Service screen will be displayed.
3. Press and hold the ENTER switch (C) for approx 3-5 sec.
4. Ignition OFF.



C A

B

HOLDEN VE COMMODORE 2006

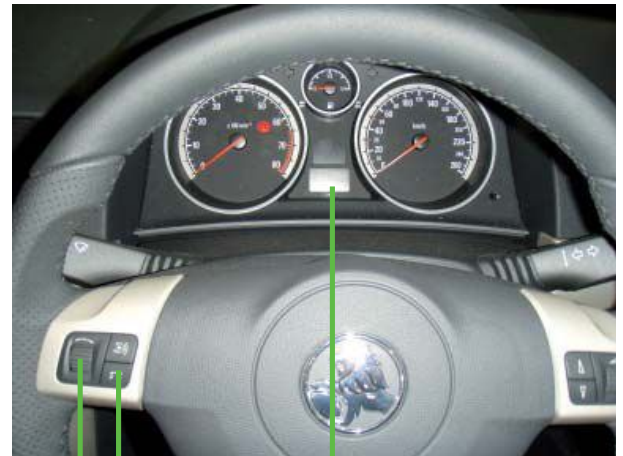

C A

B

HOLDEN STATESMAN 2004

HOLDEN COMMODORE VZ 2004-2005

****Service Vehicle Soon****

(Displayed in ECM for V6 & GEN IV, PCM for GEN IIIV8)

If you see the large warning message **"Service Vehicle Soon"** displayed, this indicates an **ENGINE FAULT** has been detected.

An audible sound will be heard with this warning.

This is **NOT** a Service Light Reset procedure. Warning message will turn off when there are no more faults detected in the engine.



HOLDEN TIGRA 2005-2007

1. Ignition OFF.
2. Press and hold down reset button.
3. Continue to hold down reset button and turn ignition ON.
4. Continue to hold down reset button until service light indicator is reset.

HOLDEN VECTRA JS 1999-2003

HOLDEN ZAFIRA 2001-2005

1. Ignition OFF.
2. Press and hold button A.
3. Continue to hold down button A and turn ignition ON.
4. Continue to hold down button A for approx 10-15 sec until the red light turns off.

Note: On the Zafira “----” will be displayed.

5. Turn ignition OFF and ON to confirm.



HOLDEN JS VECTRA 1999



HOLDEN ZAFIRA 2004

HOLDEN VECTRA ZC 2003-2007

1. Ignition OFF. Trip odometer should display trip recorder reading.
2. Press and hold trip reset button, located in the dash display area.
3. Continue to hold down trip button and turn ignition ON.
4. Continue to hold down trip button. In approx 10-15 sec, the service interval and “INSP” will appear in the display.
5. Continue to hold down trip button until “---” appears in the display.
6. Release trip button.
5. Ignition OFF.